

MX E008~E013 | Open/Close/Jog/Mod

Overview, Specifications, Dimensional Data, Materials of Construction, Wiring Diagrams

Haz Loc

Max Air Electric™


Max-Air
TECHNOLOGY

Rev: 09/19/22



Website

MX E008~E013 Series Open/Close/Jog/Modulating

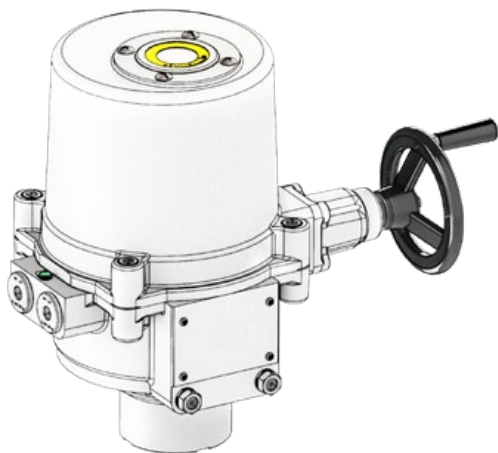

Overview

The MX E008~E013 Series are Hazardous Location-rated quarter-turn electric industrial service actuators delivering up to 1335 in-lb / 150Nm torque in voltages ranging from 12VDC up through 230VAC, and available in 2 position (Open/Close), Floating (Open/Close/Jog) or Modulating (4-20mA default or 2-10Vdc) control schemes. Easy access mechanical travel stops. (2) Form C auxiliary switches and an internal anti-condensate heater are standard. Key features include:

- 12v & 24v models operate on AC or DC power supplies.
- 120vac & 230vac models operate on 50 or 60Hz supplies.
- Visual Position indicator
- ISO5211 compliant mounting with double-square drive socket
- Clutch-free manual override handwheel standard
- IP68 Submersion
- Torque Switches

Options

- Chain Wheel
Override
- Manual Override
Lockout

HAZARDOUS LOCATION RATING

Class I, Division 1, Groups C, D T4
Class II, Division 1, Groups E, F & G T130°C
Class I, Zone 1, Ex db IIB T4 Gb (for Canada)
Class 1, Zone 1, Aex db IIB T4 Gb (for US)
Class II, Zone 21, Aex tb IIIC T130°C Db (for US)
Ex tb IIIC T130°C Db (for Canada)
(Zones 20, 21 or 22 not applicable in Canada)

Specifications

		MX E008	MX E013
Supply	Torque Output (in-lb / Nm)	800 in-lbs / 90Nm	1335 in-lbs / 150Nm
24V	Starting Current - DC Amps	10.0A	10.0A
	Running Current - DC Amps	2.8A	2.6A
	Speed (90°) @DC, seconds @ rated load	18 sec	27 sec
	Motor, Voltage, Type, Class	24VDC 2-Pole Brush, Class F	24VDC 2-Pole Brush, Class F
	Motor Power	40W	40W
	Duty Cycle	100% (EN 60034) / Class A/B/C (ISO 22153)	
120V	Starting Current - AC Amps	3.0A	3.0A
	Running Current - AC Amps	1.2A	1.2A
	Speed (90°) @60Hz, seconds @ rated load	17 sec	26 sec
	Motor, Voltage, Type, Class	120VAC Split-Phase TENV Class F	120VAC Split-Phase TENV Class F
	Motor Power	40W	40W
	Duty Cycle	100% (EN 60034) / Class A/B/C (ISO 22153)	
230V	Starting Current - AC Amps	2.0A	2.0A
	Running Current - AC Amps	0.6A	0.6A
	Speed (90°) @60Hz, seconds @ rated load	17 sec	26 sec
	Motor, Voltage, Type, Class	230VAC Split-Phase TENV Class F	120VAC Split-Phase TENV Class F
	Motor Power	40W	40W
	Duty Cycle	100% (EN 60034) / Class A/B/C (ISO 22153)	
ALL	Environmental Rating	NEMA 4/4X & IP68	
	Electrical Entry	3/4" EMT x 2	
	Control	Open/Close/Jog, Modulating, 2 Position, 3 Position	
	Auxiliary Switch - End of Travel	(2) Form C Volt-Free, Shared Common, Rated 3A @ 250vac, 0.5A @ 30VDC	
	Ambient Operating Range	-22°F~-158°F (-30°C~+70°C)	
	Humidity Range	0-95% RH	
	Altitude Limit	9850 ft / 3000 m	
	Weight (kg / lbs)	11 kg / 24.2 lbs	

* All Amperage and speed specifications based on Open/Close Standard Duty motors @ 40°C ambient.

File Name: Max-Air_DataSheet_MX-E008-E013.pdf

MX E008~E013 | Open/Close/Jog/Mod

Overview, Specifications, Dimensional Data, Materials of Construction, Wiring Diagrams

Haz Loc

Max Air Electric™


Max-Air
TECHNOLOGY

Rev: 09/19/22




Website

Dimensional Drawing

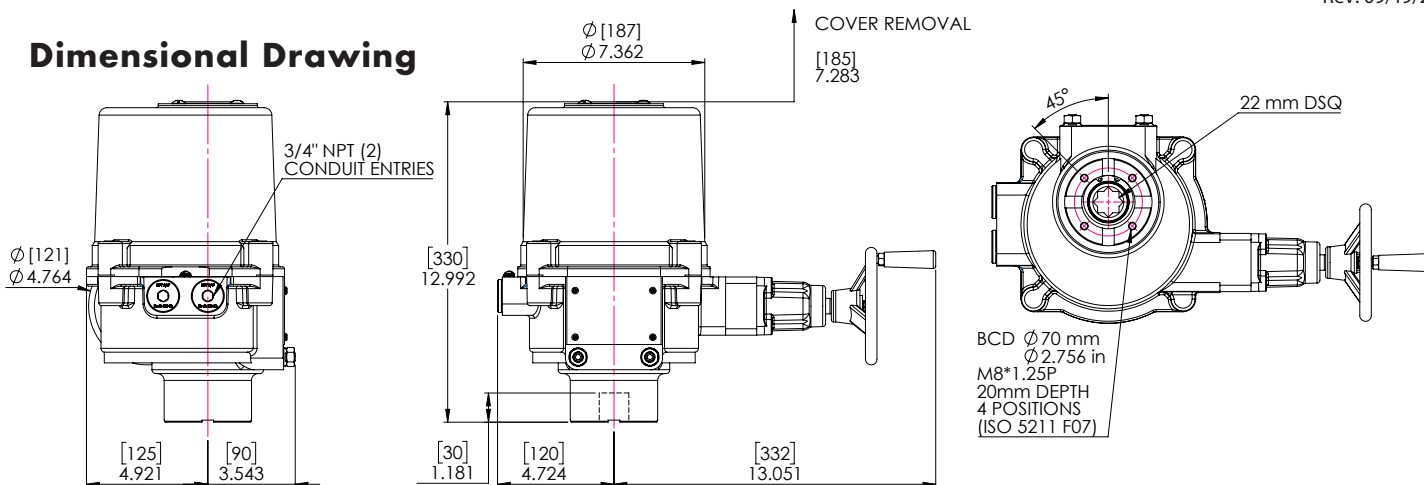

Materials of Construction

#	DESCRIPTION	MATERIALS
1	Actuator	ADC10 Aluminum Alloy
2	Indicator	Soda Lime Glass
3	Cover Screw	SUS304 Stainless Steel (Qty. 4)
4	EMT Port Seals	SUS304 Stainless Steel
5	Cover Seal	Viton
6	ISO Mount Profiles	ADC10 Aluminum Alloy
7	Output Socket	45C Carbon Steel
8	Handwheel	PA6 Nylon
9	Mechanical Stop Screw	SUS304 Stainless Steel

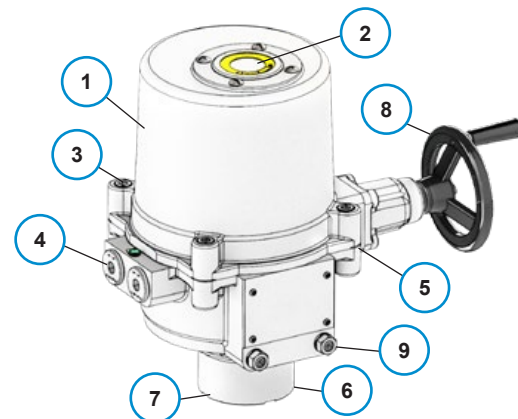


Wiring Diagrams

Typical wiring diagram shown.

Max-Air reserves the right to change specifications through a continuous-improvement program.

Contact Max-Air for product specific wiring diagrams prior to engineering or installation efforts.

Open/Close/Jog

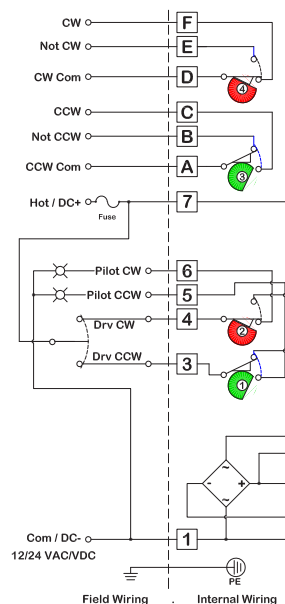

Modulating

