

ME C004 LCU B | Open/Close/Jog/Mod

Overview, Specifications, Dimensional Data, Materials of Construction, Wiring Diagrams

Max Electric™


Max-Air
TECHNOLOGY

Rev: 06/21/22



Website

ME C004 LCU B Series Open/Close/Jog/Modulating

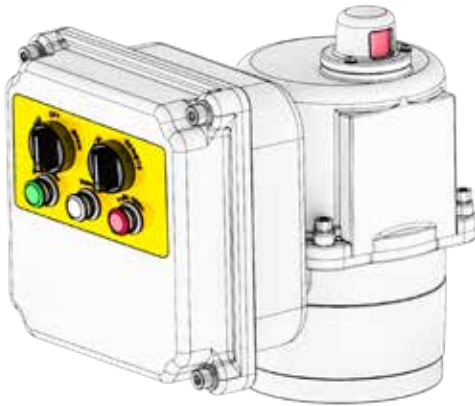

Overview

The ME C004 LCU B Series are quarter-turn electric industrial service actuators delivering up to 445 in-lbs torque in voltages ranging from 12vdc up through 230vac, and available in 2 position (Open/Close), Floating (Open/Close/Jog) or Modulating (4-20mA default or 2-10vdc) control schemes. Units are equipped with a Local Control Unit (LCU) Knob/Knob Type with Open, Closed & Power indicators, Remote Mode Status Output, and Fault Mode Status Output, to facilitate HOA operation at the actuator. (2) Form C auxiliary switches and an internal anti-condensate heater are standard. Key features include:

- 12v & 24v models operate on AC or DC power supplies.
- 120vac & 230vac models operate on 50 or 60Hz supplies.
- 3D Raised Position indicator
- ISO5211 compliant mounting with double-square drive socket
- Hex override socket
- Local Control Stations

Options

- IP68 Submersion
- Battery Backup

Specifications

ME C004 LCU B		
Supply	Torque Output (in-lb / Nm)	445 in-lb / 50Nm
12V	Starting Current - DC Amps	3.0A
	Running Current - DC Amps	2.5A
	Speed (90°) @DC, seconds @ rated load	34 sec
	Motor, Voltage, Type, Class	12VDC 2-Pole Brush, Class F
	Motor Power	10W
	Duty Cycle	100% (EN 60034) / Class A/B/C (ISO 22153)
24V	Starting Current - DC Amps	2.0A
	Running Current - DC Amps	1.4A
	Speed (90°) @DC, seconds @ rated load	36 sec
	Motor, Voltage, Type, Class	24VDC 2-Pole Brush, Class F
	Motor Power	10W
	Duty Cycle	100% (EN 60034) / Class A/B/C (ISO 22153)
120V	Starting Current - AC Amps	2.0A
	Running Current - AC Amps	0.7A
	Speed (90°) @60Hz, seconds @ rated load	27 sec
	Motor, Voltage, Type, Class	120VAC Split-Phase Cap Run TENV Class F
	Motor Power	10W
	Duty Cycle	100% (EN 60034) / Class A/B/C (ISO 22153)
230V	Starting Current - AC Amps	3.0A
	Running Current - AC Amps	0.4A
	Speed (90°) @60Hz, seconds @ rated load	25 sec
	Motor, Voltage, Type, Class	230VAC Split-Phase Cap Run TENV Class F
	Motor Power	10W
	Duty Cycle	100% (EN 60034) / Class A/B/C (ISO 22153)
ALL	Environmental Rating	NEMA 4/4X & IP67
	Electrical Entry	1/2" EMT x 2
	Control	Open/Close/Jog, Modulating
	Auxiliary Switch - End of Travel	(2) Form C Volt-Free, Rated 10A @ 250vac, 5A @ 30VDC
	Ambient Operating Range	-22°F~+149°F (-30°C~+65°C)
	Humidity Range	0-95% RH
	Altitude Limit	9850 ft / 3000 m
	Weight (kg / lbs)	5.5 kg / 12 lbs

* All Amperage and speed specifications based on Open/Close Standard Duty motors @ 40°C ambient.

** Refer to 3 phase data sheets for 3 phase power.

File Name: Max-Air_DataSheet_ME-C004-LCU.pdf

ME C004 LCU B | Open/Close/Jog/Mod

Overview, Specifications, Dimensional Data, Materials of Construction, Wiring Diagrams


Max-Air™ Electric

Max-Air
TECHNOLOGY

Rev: 06/21/22




Dimensional Drawing

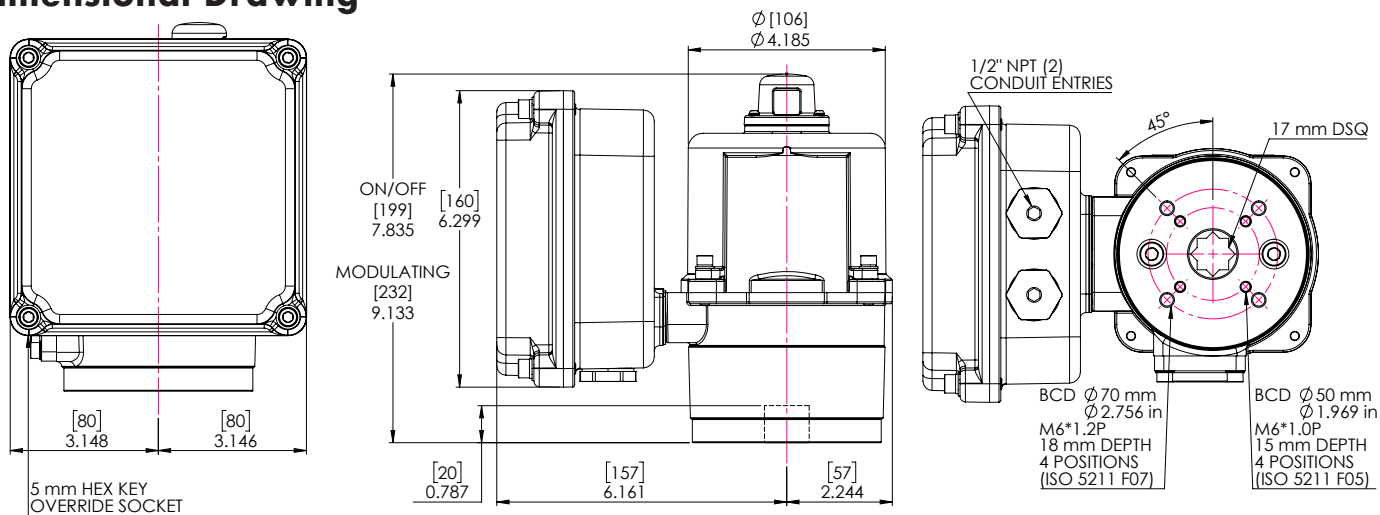

Materials of Construction

#	DESCRIPTION	MATERIALS
1	IP67 Actuator Housing	ADC3 Aluminum Alloy
2	Indicator	ADC12 Cast Aluminum Shield Over Clear Polycarbonate
3	Captured Cover Screw	SUS304 Stainless Steel (Qty. 4)
4	Manual Override Socket	SCM440 Carbon Steel
5	IP67 Cover Seal	NBR O-Ring
6	Main Output Gear	ASAE6140 Steel, Hardened
7	IP67 Local Control Unit	ADC3 Aluminum Alloy

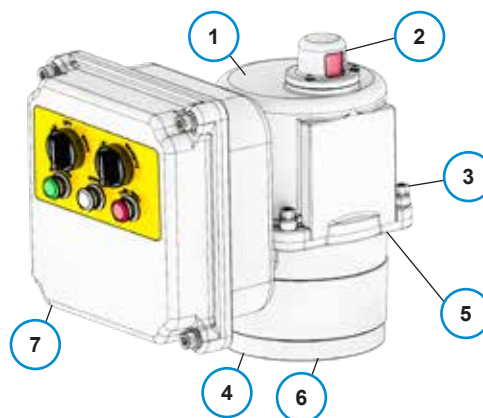

Wiring Diagrams

Typical wiring diagram shown.

Max-Air reserves the right to change specifications through a continuous-improvement program.
Contact Max-Air for product specific wiring diagrams prior to engineering or installation efforts.

